




Door controller

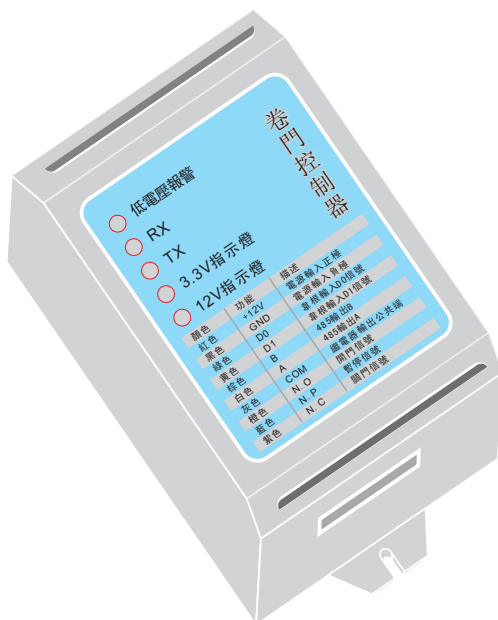

Model:JTDR-2

Notice: re-power again after setting be finished

Product Introduction

JTDR-2 adopts 2.4GHZ free frequency wireless communication technologies with high sensitivity, low power consumption, stable function, high capacity of resisting disturbance& high data transmission speed, which be widely used in elevator control system, access control system, parking management system, automatic rolling gate system, etc.

Function Introduction

- ✦ The operation is simple, convenient, fast
Write the card ID though desktop card device, which can instead of complicated parking controller for simple type parking management system;
- ✦ High security of resisting disturbance
Data transmission after the unique program encryption technology, multi-type checking way for data processing ;
- ✦ Store card ID
The number of people use can reach to 1000, the main reason is that controller has enough memory and which can store 1000 pcs card ID;
- ✦ Multi-type data output format
With Wigand data input, RS485 data output.
- ✦ With novel appearance, stable function, High quality & Reasonable Price.

Technology parameter

Products size	JTDR-2
Power supply	DC12V/3A
Work current	38mA
Baud rate	9600
Work frequency	2.4GHz~2. 483GHz
Operating temp	-20℃~+85℃
Relative humidity	≤90%
Receiving sensitivity	-90dBm
Memory support capability	1000pcs
Relay load capacity	AC250V-5A、 DC30V-5A
Copper core load capacity	1. 36A
Size	52. 5mm*95mm*30mm
Net weight	80g